


# 60000E

## User's Manual

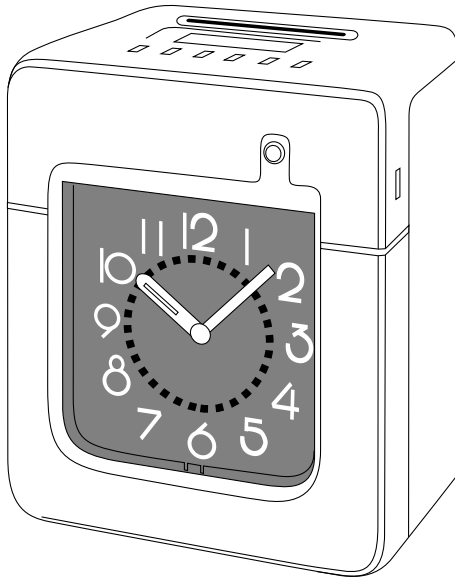

Lathem Time Corporation

# Setting the Daylight Saving Time (D.S.T.)

## Daylight saving time function

### ❖ 1 D.S.T. execution time

At 2:00 a.m. on the first day of summer time, the clock automatically gains one hour to show 3:00 a.m. When 3:00 a.m. comes on the last day of the summer time period, it loses one hour and returns to 2:00 a.m.

### ❖ 2 Setting D.S.T.

#### Example:


Start date Sunday, March 25, 2001

End date Sunday, October 28, 2001

If set as the above, the unit remembers the start date as the last Sunday of March and the end date as the last Sunday of October. Once set, the unit automatically updates the settings every year thereafter. No further manual setting is necessary.

- Daylight saving time is not pre-set at the factory (with the indication of month 00 and day 00).
- The **D.S.T.** button stays lit up during its setting operation.

**1** Press **SELECT** to cause the fourth button from the left, **D.S.T.** to light up.

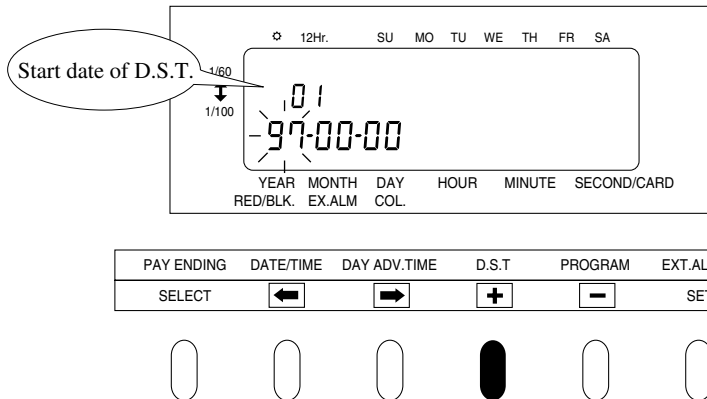


**2** Setting the start date

"01" is indicated at the upper left of the display during setting of the start date.

(1) Press **←** or **→** to cause digits to flash, and then press **+** or **-** to select the desired time.



**Example:** If your D.S.T. starts on March 25, 2001, adjust the digits to "01-03-25".

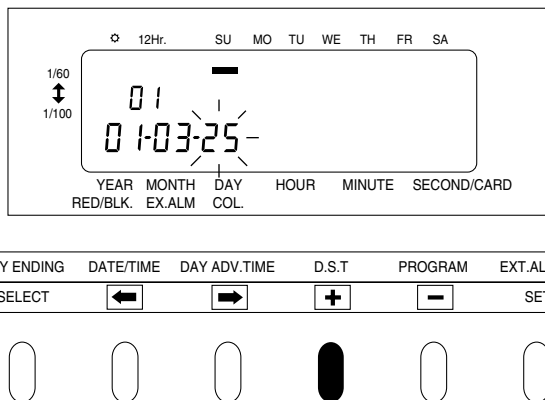

(2) Check the settings on the display and press **SET**. Now the setting is completed.



### 3 Setting the end date

When the start date setting is completed, the indication at the upper left automatically shifts to "02". You are now in the end date setting mode.

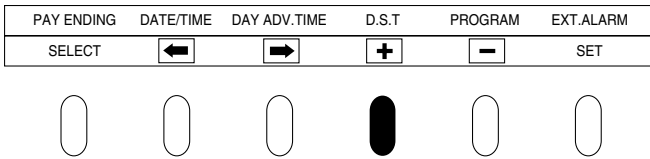
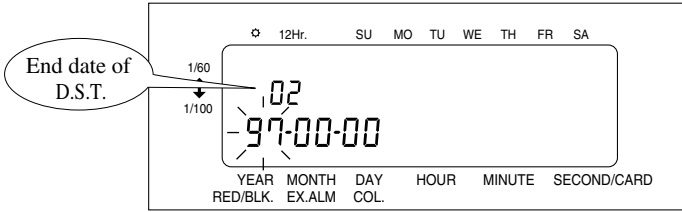


(1) Press or to cause digits to flash, and then press or to select the desired time.

**Example:** If D.S.T ends on October 28, 2001, adjust the digits to "01-10-28".

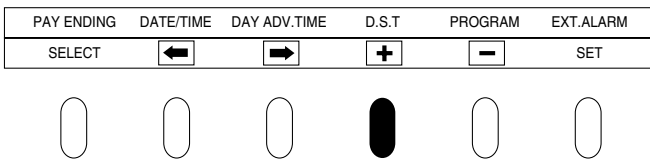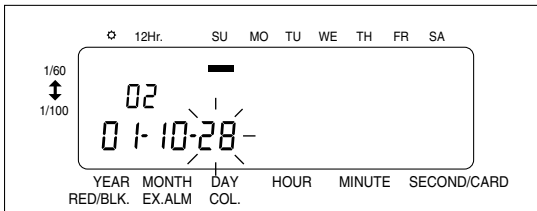

(2) Check the settings on the display and press **SET**. Now the setting is completed.



#### How to Cancel D.S.T. Settings

Place the unit to the D.S.T. start date setting mode as described above (1) and press or to cause month digits to flash. Then select "00" and press **SET** to disable the D.S.T. function.