





HOW TO PRINT PARAMETER SETTINGS USING A MODEL 7000E

STEP 1: Removing Top Cover

Unlock cover. Hold the left and right sides of the cover and lift up.



Reset switch
(inside the small
round hole)

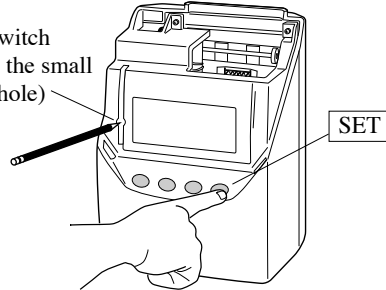

Step 2 (illustration)


STEP 2: Activating "Parameter Print" Mode

Press and hold the right control button (4th), and press reset switch simultaneously while holding down right control button. Display goes blank.

Release Reset button first then release right-side button. Display will show (1P) and (1).

STEP 3: Print Time Card

Insert time card.
The clock will
print parameters on
time card as shown
on right..

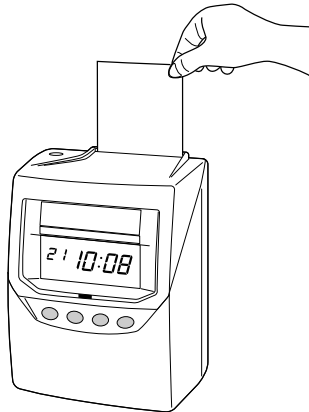


STEP 4: Exit "Parameter Print" Mode

Press and release Reset
Switch (see illustration in step 2
for location of Reset Switch).
Normal operation will resume.

STEP 5: Replacing Top Cover

Fit the plugs on both sides of
cover into the holes located on
the unit of the body. Then
push down while pulling
the cover slightly forward.

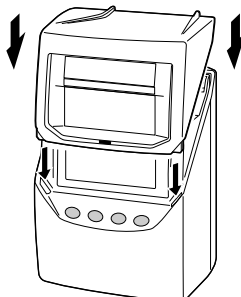

No. _____			001	
Name _____				
Period _____				
Hours _____	Rate _____	Amount _____		
START	STOP	WORKED	ACCUMULATED	TASK
IN	OUT	HOURS	TOTAL	COMMENTS
QR-3751a93	information	P1/5		
2001/02/21	04:53	000293		
Pay Period	5 - 1			
Print Format	2 - 2	- 2		
Round	1 - 1			
Auto Break	08:30 - 60			
MAX IN	1 - 13			
Button Function	2			
DST	b:01/04/01 e:01/10/28			
Language	1			
000101:24:00:00	00:00:00	00:00:00		
010127:23:59:00	010218:03:31:08			
B = Automatic Break Deduction				
Signature _____				
© 2002 Lathem Time. Printed in the USA.				E7

Not actual imprint.